

06/16/00
jc859 U.S. PTO

06/19/00

A

Please type a plus sign (+) inside this box --> ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C. F. R. § 1.53(b))

Attorney Docket No. 5601-128

First Inventor or Application Identified Hongy Lin et al.

Title POWER ADAPTER FOR NOZZLE HEATER AND TERMINATION METHOD FOR THICK FILM RESISTANCE HEATER

Express Mail Label No. EL350306281US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 21]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6]
4. Oath or Declaration [Total Pages 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENTS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☒ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
 - * Small Entity
13. ☐ Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment.,

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

(Insert Customer No or Attach bar code label here):

or ☐ Correspondence address below

Name					
Address					
City	State	Zip Code			
Country	Telephone	Fax			

Name (Print/Type)	Matthew A. Rosenberg	Registration No. (Attorney/Agent)	40,149
Signature	<i>Matthew A. Rosenberg</i>	Date	June 16, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

In re Application of: Hongy Lin et al.
For: POWER ADAPTER FOR NOZZLE HEATER AND TERMINATION METHOD
FOR THICK FILM RESISTANCE HEATER
Serial No.: _____
Filed: June 16, 2000
Examiner: _____
Group Art Unit: _____

jc858 U.S. PTO
09/595951
06/16/00

I hereby certify that this

Utility Patent Application Transmittal;
Fee Transmittal;
Application Fee;
Application;
Declaration / Power of Attorney;
Assignment and Recordation;
Certificate under 37 C.F.R. § 3.73(b); and
Information Disclosure Statement and References

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231
on June 16, 2000
(Date)

Matthew A. Rosenberg

(Typed or Printed Name of Person Mailing Correspondence)



(Signature of Person Mailing Correspondence)

EL350306281US

("Express Mail" Mailing Label Number)

CERTIFICATE UNDER 37 CFR 3.73(b)

Applicant: Hongy Lin et al.

Application No.: _____ Filed: herewith

Entitled: POWER ADAPTER FOR NOZZLE HEATER AND TERMINATION METHOD FOR THICK FILM RESISTANCE HEATER

Watlow Electric Manufacturing Company, a Missouri coproration

(Name of Assignee)

(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

certifies that it is:

1. ☒ the assignee of the entire right, title, and interest-, or
2. ☐ an assignee of an undivided part interest

in the patent application identified above by virtue of either:

A. ☒ An assignment from the inventor(s) of the patent application identified above. The assignment was recorded in the Patent and Trademark Office at Reel _____, Frame _____, or for which a copy thereof is attached.

OR

B. ☐ A chain of title from the inventor(s), of the patent application identified above, to the current assignee as shown below:

1. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

2. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

3. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

[] Additional documents in the chain of title are listed on a supplemental sheet.

☒ Copies of assignments or other documents in the chain of title are attached.

The undersigned (whose title is supplied below) is empowered to sign this certificate on behalf of the assignee.

June 14, 2000
Date

Louis P. Steinhauser
Signature


Louis P. Steinhauser

Typed or printed name

Director of Corporate R & D

Title

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to The Commissioner for Patents
Box PATENT APPLICATION
Washington, DC 20231


Signature
June 16, 2000
Date of Signature

Hongy Lin
Scott S. Steiner
Thomas M. Laskowski
Attorney Docket No. 5608-128

POWER ADAPTER FOR NOZZLE HEATER AND TERMINATION METHOD FOR THICK FILM RESISTANCE HEATER

Field of the Invention

The present invention relates to resistance heaters and more specifically to a power adapter for resistance heaters used on injection molding runner nozzles and to a method of termination that allows said power adapters to be used for thick film resistance heaters.

Background of the Invention

It is well-known in the plastics industry to mold thermoplastics with hot runner systems. In this system, melted thermoplastics ("melt") is run through a series of channels and through a series of nozzles before being injected into a mold. The nozzles protrude from a manifold, which houses the melt channels. A pair of complementing mold platens together form a mold cavity into which the nozzles empty the melt.

The importance of keeping the nozzles heated to prevent the melt from freezing before entering the mold cavity is also well-known. Originally, resistive element heaters were integrally designed with the nozzles. However, the heating elements of these

009190-0600

heaters had shorter life spans than the nozzles, so it was unnecessarily expensive to replace the entire nozzle when the heating element failed.

To overcome this expense, heaters were built separate from the nozzle. For example, cable heaters would be embedded in or assembled with a band or ring that would clamp or slide over the nozzle. More recently it has been proposed by Watlow Electric Manufacturing Company of St. Louis, Missouri, to place a thick film resistive heating element on a metal substrate that could be slid over a nozzle. Obviously, if the substrate is metal, a dielectric layer must also be introduced between the heating element and the substrate. This is typically done by a spraying, printing, or dipping method, or any other similar method, all of which are well-known and equivalent alternatives to one of ordinary skill in the art of thick film technology.

The major limitation, even with the separate heaters, is that changing the heater requires significant down time. The heaters are wired into the molding system, which has wiring channels embedded in the manifold. Therefore, replacing the heater means accessing the wiring channels, which in turn means a significant down time for a heater change.

The other limitation related specifically to the thick film heaters is that there was no easy way to terminate leads on the end of the heating elements. Power leads on thick film heaters have been typically soldered to the heating element. The limitation here is that solder melts at 190°C so the application temperature is limited to approximately 125°C, which is insufficient for a hot runner system.

It is also known to use mechanical terminations with a thick film heater where a ring with an insulator (such as mica) is clamped over the leads to mechanically hold

them in place against the heating element. There are many disadvantages to this type of assembly. For example, the assembly is bulky, cumbersome, complex, and expensive. Even worse, however, the additional space taken by this assembly creates a thermal mass, which can increase temperature variations of the heater.

Summary of the Invention

Accordingly, it is an object of the present invention to overcome the disadvantages of the prior art by providing an electrical adapter to provide power to a nozzle heater for a hot runner molding system.

It is another object of the present invention to provide such an adapter that allows for quick and easy removal and replacement of a failed heater.

It is yet another object of the present invention to provide such an adapter to work with a heater that uses a thick film heating element.

It is still another object of the present invention to provide a new termination of thick film heating elements that can withstand high temperatures.

It is still further an object of the present invention to provide such a termination of thick film heating elements that is compact, yet durable.

In keeping with the above enumerated objects, the present invention provides a power adapter that is permanently (or semi-permanently) installed in an injection molding system. The power adapter allows insertion of a heater and has a mechanism to retain the heater by rotating the heater into a locked position. Conversely, the heater may be removed, upon failure for instance, simply by rotating the heater in the opposite direction (to unlock it from the retaining mechanism) and pulling the heater off the nozzle.

In a hot runner system the nozzles are kept hotter than the mold. In a cold runner system (a similar "runnerless" injection molding system) the nozzles may be heated, but not to as high a degree as the mold. The present system was designed for hot runner systems, but works equally well with cold runner systems without departing from the objects of the invention.

In another aspect of the invention electrical contacts are embedded in the adapter to provide power to the heater. The contacts are preferably pliant and are electrically hard-wired through the wiring channels of the manifold.

In yet another aspect of the present invention, a thick film heater is provided with terminal plates that are designed to engage the contacts located inside the power adapter. The preferred heater is a thick film heating element deposited on a metal substrate. A novel method is used to affix the terminal plates to the end of the thick film heating element, which involves using a conductive silver-based paste as an adhesive between the terminal pad and the heating element. This termination method, which makes the present invention practical can be used in a variety of other applications unrelated to the power adapter.

Brief Description of the Drawings

So that the manner in which the above-identified features, advantages, and objects of the present invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiment thereof which is illustrated in the appended drawings.

It is noted however, that the appended drawings illustrate only a typical embodiment of this invention and is therefore not to be considered limiting of its scope,

for the invention may admit to other equally effective embodiments. Reference the appended drawings, wherein:

Fig. 1 is an isometric view of a hot runner injection molding system, upon which the present is utilized;

Fig. 2 is a side view detail of the injection molding system and accompanying nozzle of Fig. 1 in operational relationship to the present invention;

Fig. 3 is an end view of the system of Fig. 2 without the nozzle heater;

Fig. 4 is a top view of an outer layer of the power adapter of the present invention;

Fig. 5 is a side view of the outer layer of Fig. 4;

Fig. 6 is a top view of an intermediate layer of the power adapter of the present invention;

Fig. 7 is a side view of the intermediate layer of Fig. 6;

Fig. 8 is a top view of an inner layer of the power adapter of the present invention;

Fig. 9 is a side view of the inner layer of Fig. 8;

Fig. 10 is a top view of a contact of the power adapter of the present invention;

Fig. 11 is a side view of the contact of Fig. 10;

Fig. 12 is an isometric view of the power adapter of the present invention;

Fig. 13 is an isometric view of the power adapter of Fig. 12 in an operational position around a nozzle and with accompanying power leads;

Fig. 14 is a detailed top view of a termination pad of the present invention;

Fig. 15 is a detailed end view of the termination pad of Fig. 14;

Fig. 16 is an isometric view of a termination pad affixed to the end of a thick film heating element on a nozzle heater;

Fig. 17 is a close-up side view of the termination pad and thick film heater of Fig. 16;

Fig. 18 is a close-up side view of an alternate termination configuration using the termination method of the present invention;

Fig. 19 is a top view of the thick film heater and termination of Fig. 18;

Fig. 20 is an isometric view of the thick film heater and termination of Fig. 18; and

Fig. 21 is a close-up side view of another alternate termination configuration using the termination method of the present invention.

Detailed Description of the Drawings

Referring now to Fig. 1, a hot runner injection molding system 10 is shown generally. The molding system 10 has a plurality of nozzles 12 to inject molten plastics ("melt") into mold cavities. Each nozzle 12 must be heated to prevent the melt from freezing therein.

Figs. 2 and 3 show a detail of one nozzle 12. The melt channel 14 runs through the molding system 10 and into the nozzle 12. A heater 16 is adapted to surround the nozzle 12 to keep the nozzle 12 heated during operation. The preferred embodiment of the heater 16 is a thick film resistive heating element 18 disposed on a substrate 20. The substrate 20 is typically metal, however other materials may be used. If a metal substrate 20 is used, as is conventional, a dielectric layer (not shown) must first be applied by spraying, printing, or any other equivalent method, all of which are well-known in the art of thick film technology. The heating element 18 has a pair of

termination pads 22, located on the substrate 20. The termination pads 22 are typically, but not necessarily, diametrically opposed on the substrate 20.

When the heater 16 is placed on the nozzle 12, the termination pads 22 engage the power adapter 24, which is shown in further detail below. The power adapter 24 may be permanently or semi-permanently affixed either directly to the molding system 10 or indirectly by way of a flange 26 on the base of the nozzle 12.

The power adapter 24 allows for quick and easy removal, insertion, and replacement of the heater 16. Instead of rewiring a new heater 16 each time replacement becomes necessary, the power adapter 24 remains wired to a power source through conventional power leads 28 and wiring channel 30 in either the molding system 10 or mold platen 32.

The preferred power adapter 24 consists of multiple layers: a distal layer 34 (relative to the molding system 10), a proximal layer 36, and one or more intermediate layers 38. The preferred distal layer 34 has a central bore 40, which has an inside diameter approximating that of the outside diameter of the heater 16, of course with some additional room for tolerances. The bore 40 on the distal layer 34 will also have a pair of recesses or notches 42 approximating the cross-sectional shape of the terminal plates 22. Thus, it should be readily seen that the end of the heater 16 with the terminal plates 22 will only pass through the bore 40 of the distal layer 34 when the terminal plates 22 are aligned with the notches 42.

Referring now to Figs. 4 and 5, the distal layer 34 should also have a plurality of retaining bores 44, for placing retaining mechanisms such as screws or bolts (not shown) therethrough. As may be seen in Fig. 5, these retaining bores, may have small

counter bores 46 to accommodate screw or bolt heads. The preferred embodiment also has a pair of wiring bores 48 for passing power leads 28 therethrough. It should be noted that while the preferred embodiment routes the power leads 28 through the front face of the distal layer 34 of the power adapter 24, the power leads 28 may be routed from the contacts 50 directly out the side or rear of the power adapter 24 without departing from the scope of the invention.

As seen in Figs. 6 and 7, the intermediate layer(s) 38 should have a central bore 52 that lines up concentrically with the central bore 40 of the distal layer 34. The central bore 52, if it does not have notches similar to notches 42 of the distal layer, should be large enough (as measured by the inside diameter) to accommodate not only the heater 16, but the termination plates 22, as well. Retaining bores 44 and wiring bores 48 should continue through the intermediate layer(s) 38, however if multiple intermediate layers 38 are used, intermediate layers 38 closer to the proximal layer 36 may have narrower wiring bores 48 sized to accommodate only the conducting element of the power leads 28 as opposed to the insulation therearound.

The proximal layer 36, shown in Figs. 8 and 9, should have a central bore 54 with a lip 56 at or near the bottom 58 of the proximal layer 36 - that is the end that is closest to the molding system 10 when installed. The lip 56 should be sized so that the nozzle 12 may pass completely through the bore 54, but the substrate 20 of the heater 16 may enter into the bore 54 only as far as the lip 56. Thus the lip 56 acts as an axial stop to the heater substrate 20. Additionally, the inside wall of bore 54 should have at least one, and preferably two radial stops 60 protruding therefrom. The radial stops 60 may optionally be integrated with the lip 56. The radial stops 60 are adapted to engage the

termination plates 22 as a heater 16, fully inserted into the adapter 24, is rotated to prevent further rotation. The proximal layer 36 will also have continuations of the wiring bores 48 and the retaining bores 44. In the proximal layer 36, however, the retaining bores 44 are preferably threaded and possibly narrower than in the other layers for purposes of carrying out their retaining function.

Furthermore, the proximal layer 36 should have a pair of channels 62 in which contacts 50 are embedded; however more than two may be used if a particular heater embodiment requires more than two leads due, for instance, to a 3-phase design or an integrated sensor. The channels 62 (and thus the contacts 50) should be positioned in relation to the radial stops 60 (or vice versa) such that a fully rotated heater 16 will have its termination plates 22 abutting the contacts 50. Thus it should also be seen that it is desirable to have the channels 62 and contacts 50 intersect with the central bore 54 of the proximal layer 36. For this same reason, the contacts 50 should be somewhat pliant. This can be accomplished either through materials selection or appropriate dimensioning of the contacts 50 so that it is sufficiently slender. The inventor has found that many materials are well suited for the contact 50, but that the preferred material for this purpose is Inconel[®]. This pliant character of the contacts 50 allows the contacts 50 to: a) give way to the termination plates 22 as the heater 16 is rotated; b) maintain a constant electrical connection between the contacts 50 and the termination plates 22 (and thus the lead wires 28 and the heating element 18); and c) provide some mechanical resistance to the rotation of the heater to prevent accidental disengagement of the heater 16 with the adapter 24. To accomplish the desired characteristics, a typical contact 50 is shown in Figs. 10 and 11. The typical contact 50 consists of a main

section 64 and a pair of outer sections 66, which are bent back to retain the contact 50 in its channel 62 and to provide a spring effect.

With the contacts 50 in place, the lead wires 28 can be indefinitely affixed to the contacts 50 using any conventional method such as welding, soldering, or mechanical. The lead wires 28 are then run to a point outside the adapter 24 where they are connected to a power source. The lead wires 28 may be routed outside the adapter 24 directly through the side of the proximal layer 36, or as is done in the embodiment shown, through wiring bores 48 and out the top surface 68 of the distal layer 34. Hence a primary objective of the invention is achieved in that the heater 16 can be replaced without disturbing the lead wires 28 or their connections to the contacts 50.

In operation of the preferred embodiment, the heater 16 is slid over nozzle 12 with the termination plates 22 aligned with notches 42 to clear the distal layer 34 of the power adapter 24. The heater 16 continues to be slid over the nozzle 12 until it is stopped by contact between its substrate 20 and the lip 56 of the proximal layer 36. Radial stops 60 prevent the termination plates 22, and thus the heater 16, from being rotated counterclockwise. It is important to note that the directions given are by convention only, and that exchanging the locking and unlocking directions of rotation is possible and certainly within the scope of the present invention. The user rotates the heater 16 clockwise until the termination plates 22 engage the electrical contacts 50, at which point the radial stops 60 prevent further clockwise rotation. Pressure applied by the pliant contacts 50 helps reduce the chances of accidental rotation of the heater 16 due to vibrations, shock, etc. When one desires to replace the heater 16, for instance due to a failure, the heater 16 is replaced by rotating it counterclockwise until further

rotation is prevented by the termination plates 22 contacting the radial stops 60, at which point the termination plates 22 will again be aligned with notches 42. The heater 16 is then pulled off of the nozzle 12 and replaced by repeating the above steps.

The terminal plate 22 can be seen in detail in Figs. 14 and 15. It is a relatively small metal plate (for example about 0.1 square inches in frontal surface area for a heating element 18 rated for 5 amps). The preferred embodiment of terminal plate 22 has an hourglass-shaped groove 70 in the middle to receive contact 50. The neck of the groove 70 should be only slightly wider than contact 50. The terminal plate 22 may also have a slight curvature to match that of the heater 16 substrate 20.

Conventional methods to hold the terminal plate 22 to the substrate 20 will produce less than desirable results. It should be reiterated that if a metal substrate 20 is used, a thin dielectric layer is needed between the substrate 20 and the heating element 18 or terminal plate 22 (which preferably rests directly on top of the heating element 18). This dielectric layer may be sprayed or printed on the substrate 20 or applied using any equivalent method, many of which are well-known. The preferred embodiment uses a novel attachment method for the terminal plate 22. A noble-metal-based conductive adhesive 72 is used to bond the terminal plate 22 (typically made of a stainless steel) directly to the end of the thick film heating element 18. It is important that the metal base in the adhesive is both conductive and non-reactive in air. The inventor has found that silver-based adhesives work particularly well.

The adhesive 72 should have high melting temperature - preferably 900°C or greater. The adhesive 72 is applied directly to the heating element 18 at a section near the end thereof designated as the terminal pad 74. Alternatively, the adhesive 72 may

be just as easily applied to the terminal plate 22 itself or both the terminal plate 22 and terminal pad 74. The terminal pad 74 is simply the end section of the thick film heating element 18 not covered with a dielectric material 76 as the remaining portions of the heating element 18 are. As mentioned above, a dielectric base 78 remains between the entire heating element 18 (including the terminal pad 74) and the substrate 20 as an insulator if a typical metal substrate 20 is utilized.

The preferred embodiment, which is detailed in Fig. 17, uses a layer of adhesive 72 that is approximately 100 microns thick once dried. By way of example, the heater shown in Fig. 17 may be terminated using the present method by brushing a silver alloy paste (the adhesive 72) on the terminal pad 74, and placing the terminal plate 22 thereon while the adhesive 72 is still wet. The assembly is dried in a convection oven at 150°C for 30 to 60 minutes to remove any solvent from the adhesive 72 and form a bond between the terminal pad 74 and terminal plate 22. The adhesive 72 is further sintered by firing in an electric furnace for 5 to 30 minutes at a temperature somewhere between 700°C and 900°C.

The resulting heater can operate in temperatures of at least up to 500°C. The bond is strong enough that a force of at least 7 pounds (150 N) perpendicular to the terminal plate 22 surface or at least 23 pounds (500 N) parallel to the terminal plate is required to break it. This is obviously an excellent bond strength considering the terminal plate used measures .375" x .25". The resulting bond also produced a mere 0.1 ohms of resistance, which is negligible compared to the resistance of the heating element 18.

Instead of using the present power adapter 24, it is also possible to weld power leads directly to the terminal plate 22. It is also possible to terminate thick film heaters with terminators other than the terminal plate 22 designed for the power adapter 24. For instance, Figs 18-20 (not drawn to scale) show a thick film heater 116 with a flat substrate 120. The heating element 118 is surrounded by a dielectric base layer 178 and dielectric outer cover 176 just as in Fig. 17. The heating element 118 ends in an uncovered terminal pad 174. Instead of placing a terminal plate 22 on the adhesive 172, an L-shaped metal plate 122 is used in its place.

In another alternative embodiment heater 216, shown in Fig. 21, a substrate 220 has a thick film heating element 218 on a dielectric base coating 278 and a dielectric over coating 276. The heating element 218 ends in an uncoated terminal pad 274 which is then covered with the adhesive 272 and a threaded bolt 222. Power conductors ("leads")(not shown) can then be attached to the threaded bolt 222 either by welding or by any mechanical retention means.

It should be noted that it is also possible to coat any embodiment of the terminal plates or their alternatives with a dielectric coating for insulation. For example, the terminal plate 22 with wires already affixed can be coated with a dielectric paste similar to that used for dielectric layers 76, 78 surrounding the heating element 18. The layer may then either be sandblasted off after a firing to bake out any solvents or the paste can be wiped off before firing. Various types of protective layers may be used in this way, such as glass insulation, polymers, or ceramics.

Many bonding agents are suitable for this termination method. The bonding agent must be highly conductive, have a high melting point, form a strong adhesive

bond, and must not break down quickly when exposed to heat. These requirements are generally satisfied by using a silver-based bonding agent, however bonding agents based on other noble-metals (gold for example) should also work. Some silver-based bonding agents have been discovered to produce somewhat better or worse results than others. In particular, it has been found that a silver-based alloy sold as ESL9562 by Electro-Science Laboratories, Inc., of King of Prussia, Pennsylvania, works very well, as does a silver-based alloy with glass frit sold as ESL590 (also from Electro-Science Laboratories, Inc.). A silver and palladium alloy has also produced very positive results.

Additionally, several methods of applying the bonding-agent to the terminal pad or terminal plate may be utilized. Although a brushing method has been found to be the preferred embodiment for use with the small and curved terminal plates designed for the present power adapter, silk screen printing, spray coating, dipping, greet tape, and direct writing have all been found to be effective, depending on the particular nature of an application. One of ordinary skill in thick film heater manufacture should readily be able to determine which adhesive application method is most suited for a particular design.

One other variable that effects bond strength seems to be firing temperature of the termination assembly after the terminal plate (and necessarily the bonding agent) have been placed on the terminal pad. Although limited data is available at this time, it has been found that 700°C to 900°C appears to be ideal with only moderate deviations of results within that range.

While the foregoing is directed to the preferred embodiments of the present invention, other and future embodiments of the invention may be devised without

departing from the basic scope thereof, and the scope thereof is determined by the claims which follow.

009130-06400

WE CLAIM:

1. A power adapter for a heater for heating a cylindrical nozzle extending from an injection molding system, said power adapter comprising:

a base mounted on the molding system around the nozzle, said base comprising at least one layer proximate the molding system and one layer distal the molding system, wherein said proximate layer has a bore extending therein having a diameter approximately equal to a diameter of the heater including termination plates of the heater, and said distal layer has a bore extending therethrough having a diameter approximately equal to the diameter of the heater excluding any termination plates of the heater;

a plurality of recesses in a side wall of said distal layer bore, each said recess adapted to allow a termination plate of the heater to pass therethrough and into said proximate layer bore;

a plurality of contacts embedded in a side wall of said proximate layer bore and corresponding in number to the number of said recesses; and

channels located within said base adapted to house leads from a power source between said contacts and a point external of said base.

2. The power adapter of claim 1, further comprising one or more stops projecting from the side wall of said wall of said proximate layer bore and adapted to prevent rotation of the termination in a given direction beyond said stops.

3. The power adapter of claim 2, wherein said contacts are compliant and embedded in the side wall of the proximate layer so as to protrude from that side wall.

4. The power adapter of claim 3, further comprising an intermediate layer between said proximate and distal layers.

5. The power adapter of claim 3, wherein the mounting of said base to the molding system is direct.

6. The power adapter of claim 3, wherein the mounting of said base to the molding system is indirect, there being a flange on the nozzle therebetween.

7. The power adapter of claim 3, wherein said channels run parallel to said bores.

8. The power adapter of claim 7, wherein said channels exit said base on a surface of said distal layer opposite the molding system.

9. The power adapter of claim 3, wherein said layers are aligned in a manner such that:

an end of the heater with termination plates will pass through said distal layer, the termination plates specifically passing through said recesses;

the end of the heater with termination plates will be engaged directly or indirectly by the molding system;

the termination plates can be rotated to abut said contacts; and

with the termination plates abutting said contacts, the termination plates cannot be withdrawn through said distal layer.

10. The power adapter of claim 9, wherein the stops are positioned to allow rotation of the terminal plates and thereby the heater only in the clockwise direction following heater insertion and to allow rotation of the terminal plates and thereby the heater only in the counter-clockwise direction from the position where the termination plates abut said contacts.

11. The power adapter of claim 3, wherein said contacts consist of a metal strip adapted to fit into a groove of the termination plates.

12. The power adapter of claim 3, where the proximate layer consists of a ceramic thermal insulator.

13. A method of terminating a thick film heater comprising the steps of:

providing a heater and a plurality of termination plates, the heater having at least one thick film resistive heating element, each heating element having two end portions adapted to contact the termination plates;

applying a conductive noble-metal-based bonding agent to a contact surface between the termination plates and the end portions of the heating element; and

affixing a termination plate to each end portion of the heating element, the bonding agent being disposed therebetween, wherein the termination plate is adapted to receive power for the heating element from an external power source.

14. The method of claim 13, wherein the noble-metal-based bonding agent is silver-based.

15. The method of claim 13, further comprising the step of attaching a power conductor to each termination plate.

16. The method of claim 15, wherein the power conductors are attached by welding.

17. The method of claim 15, wherein the power conductors are attached by soldering.

18. The method of claim 13, wherein the termination plates are threaded studs.

19. The method of claim 13, wherein the termination plates are "L" shaped.

20. The method of claim 14, wherein the bonding agent consists of an ink comprised primarily of a silver alloy.
21. The method of claim 20, wherein the bonding agent further comprises a glass frit.
22. The method of claim 13, wherein the bonding agent comprises a silver-palladium alloy.
23. The method of claim 13, wherein the heating element is protected by a dielectric except for a portion at each end, and wherein the termination plates are positioned to cover the unprotected portion of the heating element.
24. The method of claim 13, wherein said bonding agent has a melting point of at least 900°C.
25. The method of claim 13, wherein the bonding agent is applied by silk screen printing.
26. The method of claim 13, wherein the bonding agent is applied with a paint brush.
27. The method of claim 13, wherein the bonding agent is applied by spray coating.
28. The method of claim 13, wherein the bonding agent is applied by dipping the ends of the heating element in the bonding agent.
29. The method of claim 13, wherein the bonding agent is applied using a green tape method.
30. The method of claim 13, further comprising the final step of firing the bonding agent until the bonding agent has sintered thereby forming a bond between the terminal plate and the heating element.
31. The method of claim 30, wherein the baking takes place between 700°C and 900°C.

32. The method of claim 13, wherein the termination plate is curved to match the curvature of a substrate of the heater.

33. The method of claim 15 further comprising a final step of shielding the termination plate and a portion of the power conductor with a protective layer.

34. The method of claim 33, wherein the protective layer comprises glass insulation.

35. The method of claim 33, wherein the protective layer comprises a polymer.

36. The method of claim 33, wherein the protective layer comprises a ceramic.

37. The method of claim 13, wherein at least one of the heating elements is adapted for use with 3-phase power, the heating element having three end portions, each adapted to contact a termination plate.

38. The method of claim 13, wherein the bonding agent is applied directly to the terminal plate.

39. The method of claim 13, wherein the bonding agent is applied directly to the end portion of the heating element.

40. The method of claim 15, wherein the power conductors are attached by brazing.

41. The method of claim 22, wherein the bonding agent consists of an ink comprised primarily of a silver alloy.

42. The method of claim 22, wherein the bonding agent further comprises a glass frit.

Abstract

A power adapter is shown for use on injection molding runner nozzles. The power adapter provides for quick and easy installation (and removal) of thick film resistance heaters on the runner nozzles, without the need for rewiring. The power adapter comprises a series of rings that allow insertion of the terminal end of the heater, which is then rotated into a locked position. One of the rings contains contacts which are at least semi-permanently wired to a power source. To facilitate the power adapter, a novel method terminating the heating element is used. A noble-metal-based bonding agent (such a silver-base ink) is applied to the heating element and/or terminal plate. The terminal plate is then affixed to the heating element and the bonding agent is fired.

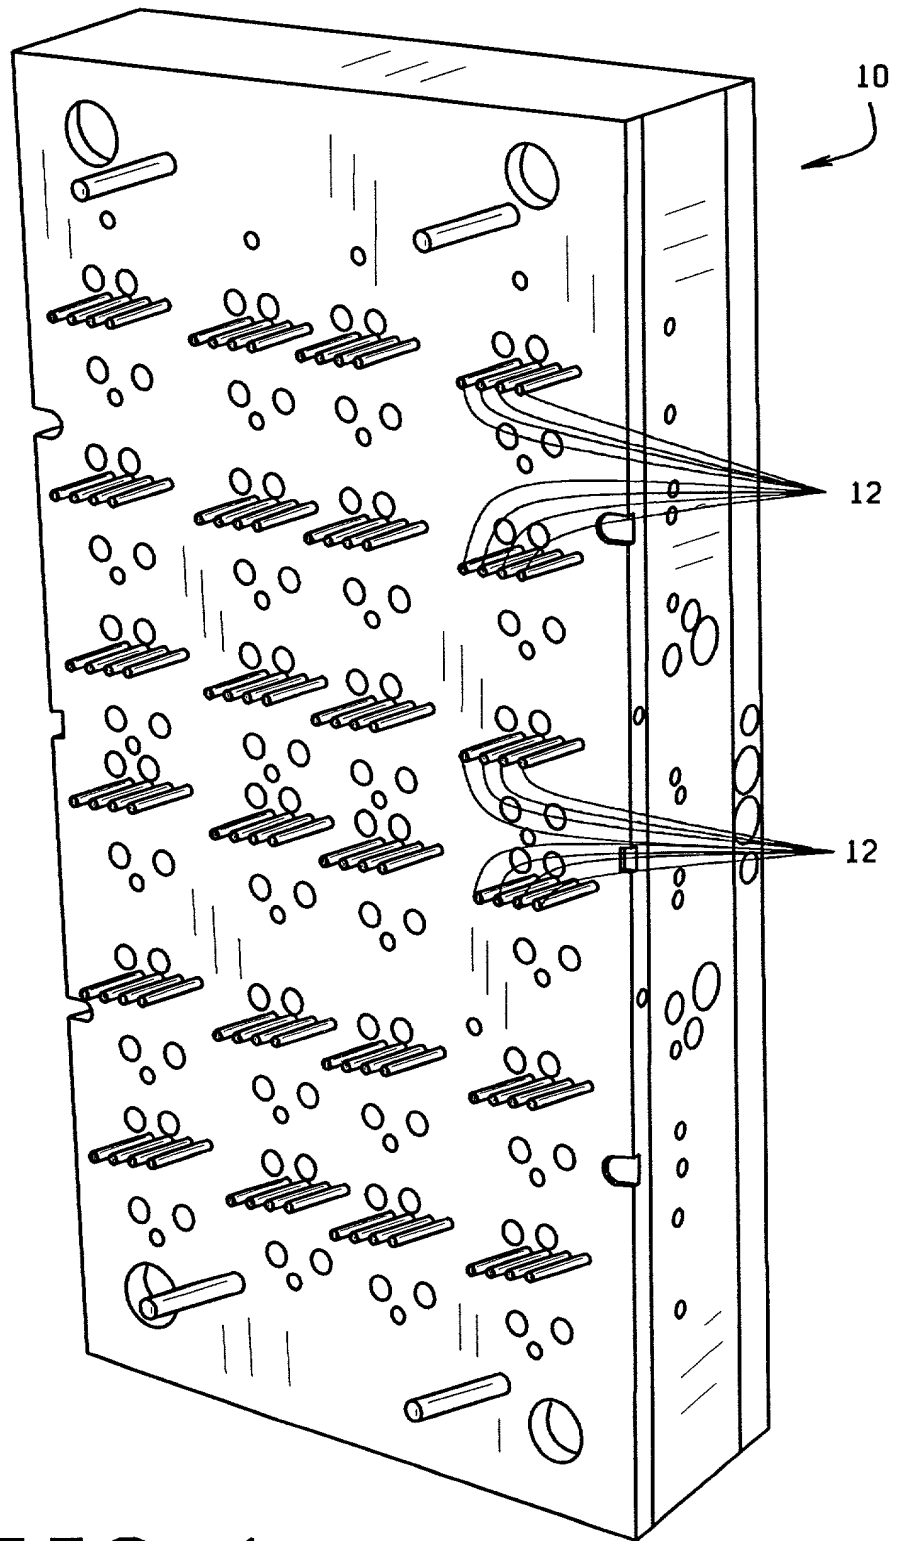


FIG. 1

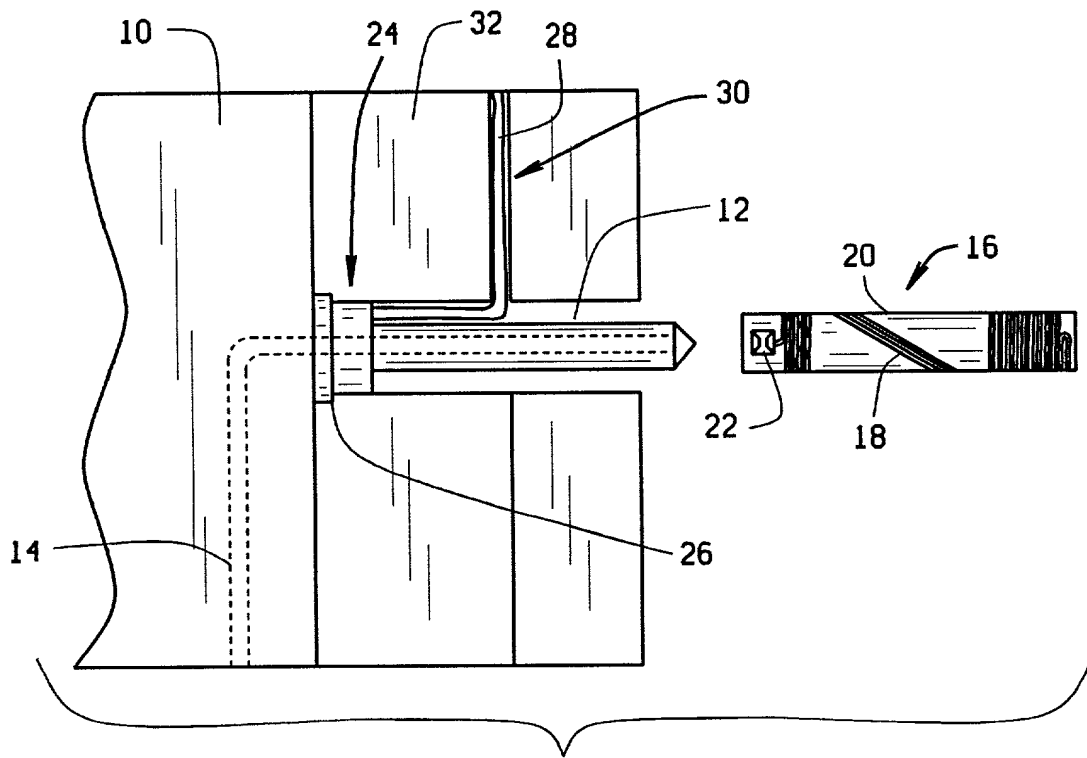


FIG. 2

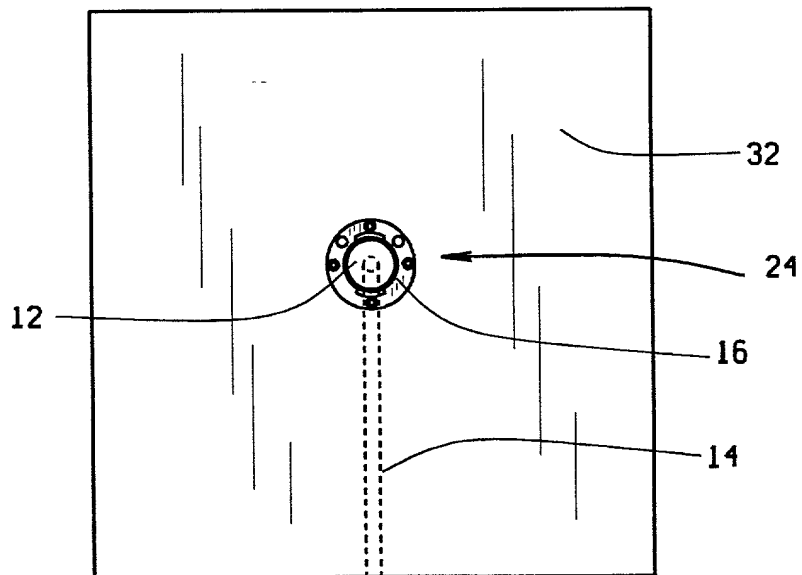


FIG. 3

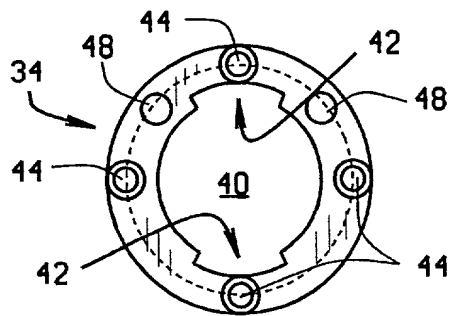


FIG. 4

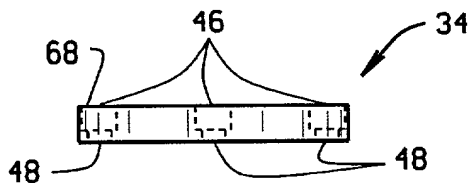


FIG. 5

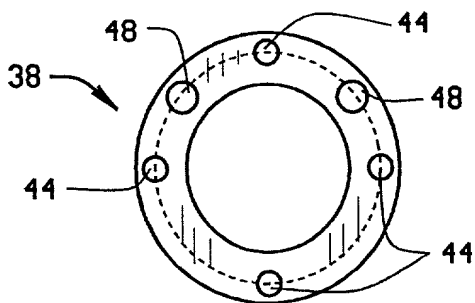


FIG. 6




FIG. 7

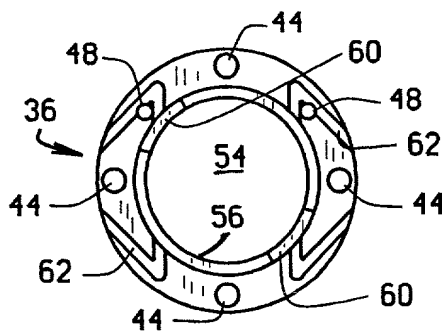


FIG. 8

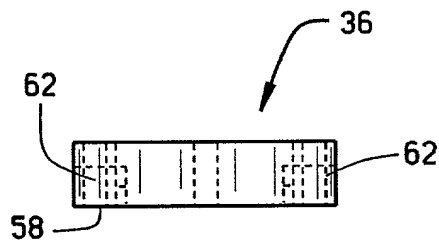


FIG. 9

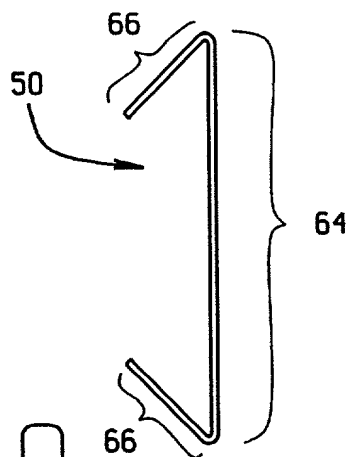


FIG. 10

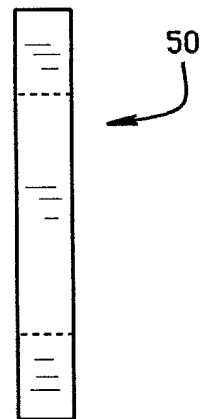


FIG. 11

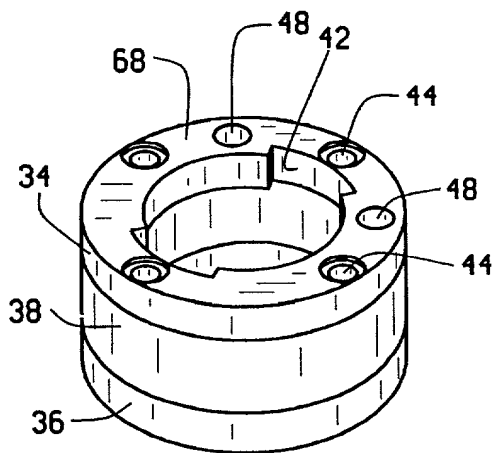


FIG. 12

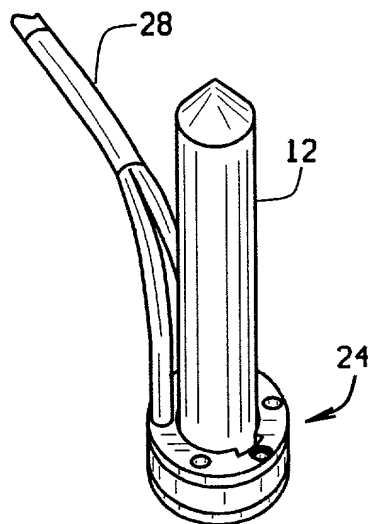


FIG. 13

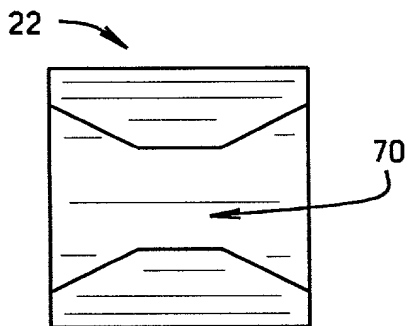


FIG. 14




FIG. 15

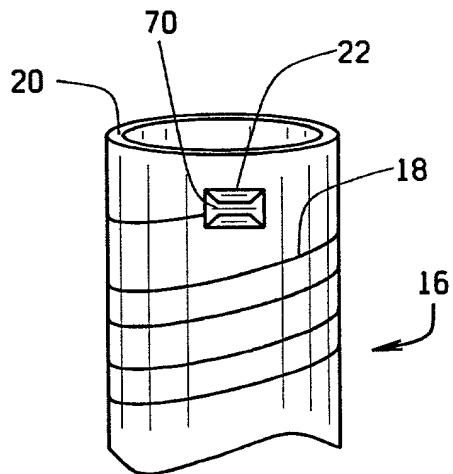


FIG. 16

009T90" T5656560

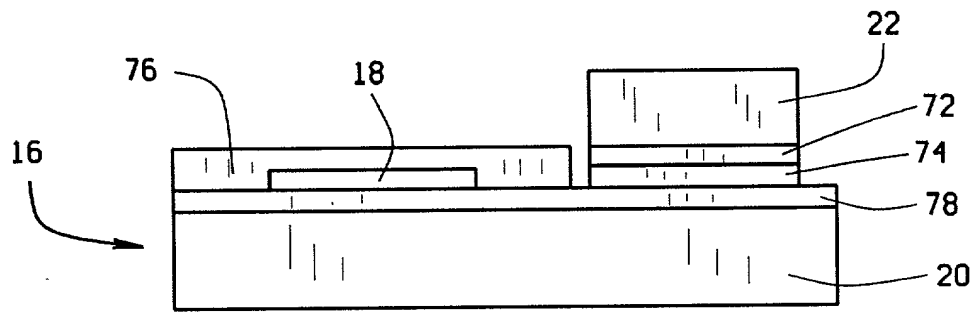


FIG. 17

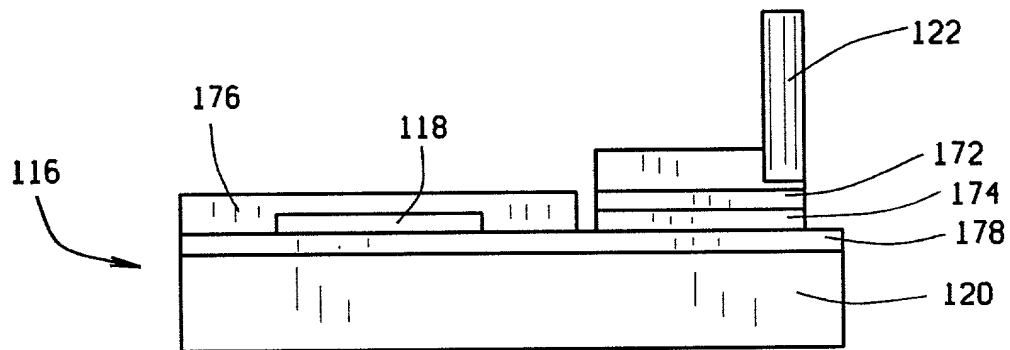


FIG. 18

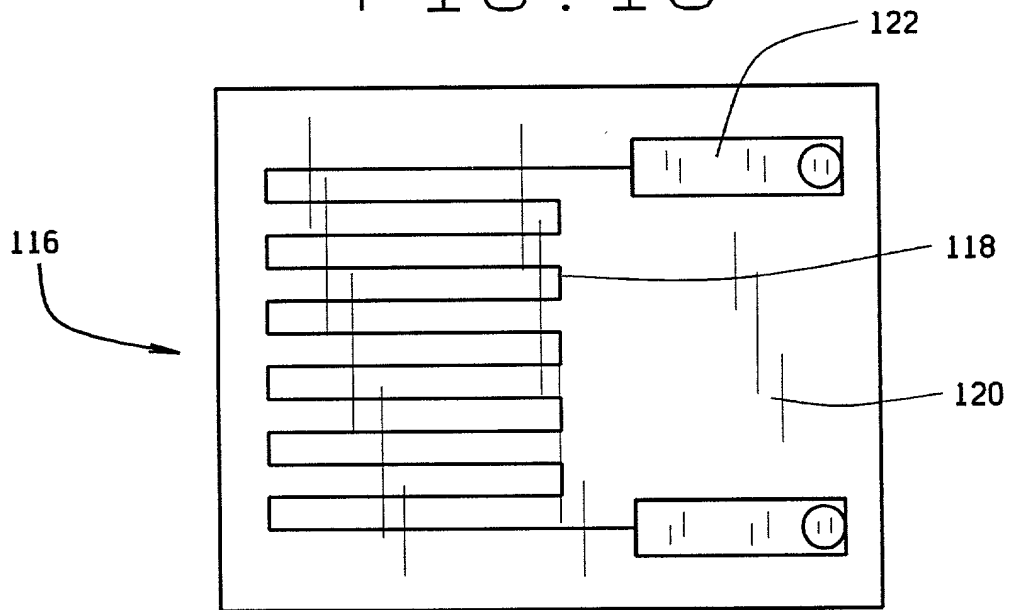


FIG. 19

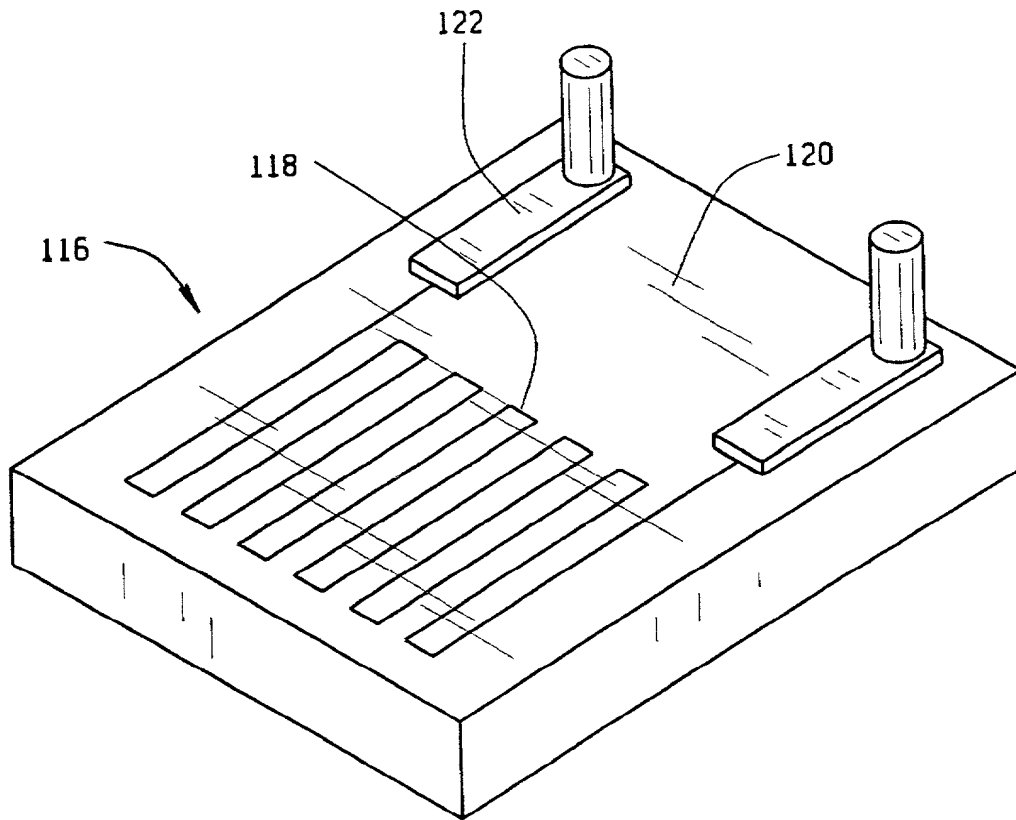


FIG. 20

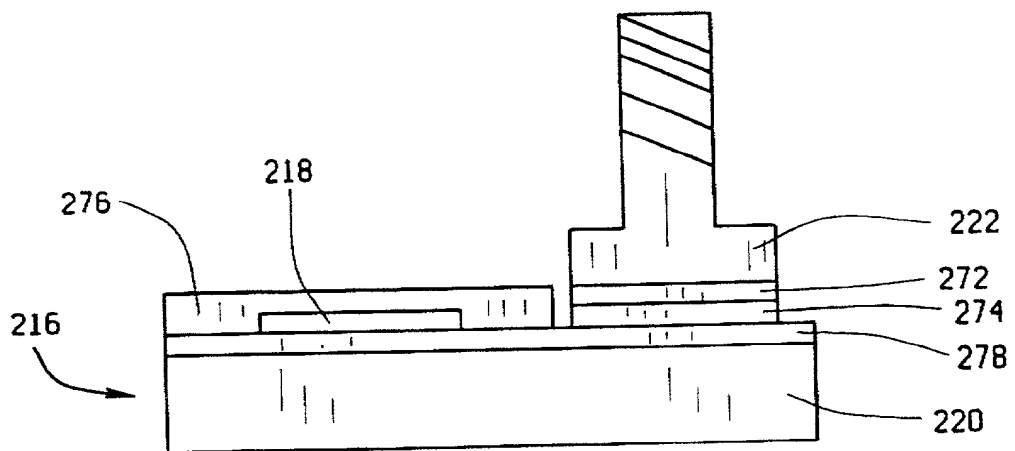


FIG. 21

Please type a plus sign (+) inside this box ---> ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	5608-128	
	First Named Inventor	Hongy Lin et al.	
	COMPLETE IF KNOWN		
	Application Number		
	Filing Date		
	Group Art Unit		
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 C.F.R. 1.16(e)) required)	
		Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

POWER ADAPTER FOR NOZZLE HEATER AND TERMINATION METHOD FOR THICK FILM RESISTANCE HEATER

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International

Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

009790" T556560

Please type a plus sign (+) inside this box -31-



PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02C attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below



Name	Registration Number	Name	Registration Number
			22243
			PATENT TRADEMARK OFFICE


☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label  OR ☐ Correspondence address below

Name	22243				
Address	PATENT TRADEMARK OFFICE				
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
Hongy		Lin	
Inventor's Signature			Date
Residence: City	Chesterfield	State	MO
Residence: City	Chesterfield	Country	US
Post Office Address	14535 Amstel Ct.		
Post Office Address			
City	Chesterfield	State	MO
City	Chesterfield	Country	US

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto



Please type a plus sign (+) inside this box -* ☐

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1 995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Scott S.				Steiner			
Inventor's Signature				Date	6/15/00		
Residence: City	San Jose	State	CA	Country	US	Citizenship	US
Post Office Address	935 Foxchase, Apt. 414						
Post Office Address							
City	San Jose	State	CA	ZIP	95123	Country	US
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Thomas M.				Lakowski			
Inventor's Signature				Date	6-14-00		
Residence: City	Pacific	State	MO	Country	US	Citizenship	US
Post Office Address	3711 Laura Lane						
Post Office Address							
City	Pacific	State	MO	ZIP	63069	Country	US
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.